

AC 176

Self Contained Ice Machine 85 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Routine maintenance visible alarm light on front panel. Water system protected by patented anti-scale system.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.



AC L 176
Large Gourmet 39 g
Ø 38 x H 41 mm



AC M 176
Medium Gourmet 20 g
Ø 30 x H 34 mm



AC S 176
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a
R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

48 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	+10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 85 kg

AC 176

Self Contained Ice Machine 85 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 85 kg

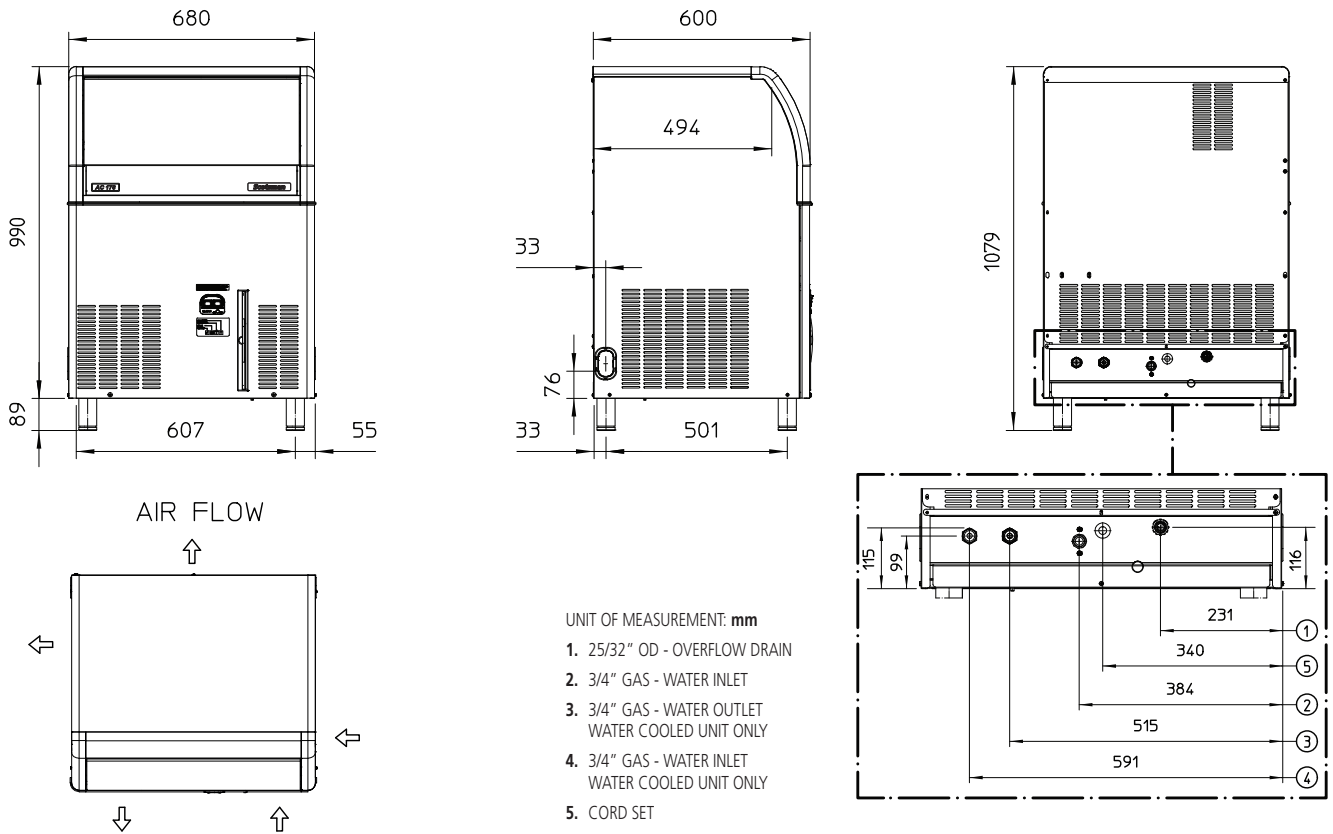

UNIT DATA		SHIPPING DATA					
Size (W x D x H)	680 x 600 x 1079 mm	Carton (W x D x H)	750 x 670 x 1170 mm				
Net weight	70 kg	Weight	80 kg	All data refer to R404A refrigerant models			

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
ACL 176 AS	230/50/1	71	70	58	25.9	15.0	7.9	860	1504	3 x 1.5	16
ACL 176 WS	230/50/1	71	70	58	25.9	15.0	79.2	610	1504	3 x 1.5	16
ACM 176 AS	230/50/1	85	83	65	25.7	16.7	7.1	900	1500	3 x 1.5	16
ACM 176 WS	230/50/1	85	80	68	20.6	14.0	79.2	610	1500	3 x 1.5	16
ACS 176 AS	230/50/1	70	69	55	29.1	16.0	9.6	900	1500	3 x 1.5	16
ACS 176 WS	230/50/1	70	69	55	29.1	16.0	79.2	760	1500	3 x 1.5	16
ACL 176 AS	230/60/1	85	83	65	26.0	17.0	9.6	860	1800	3 x 1.5	16
ACM 176 AS	230/60/1	85	83	65	26.0	17.0	9.6	900	1800	3 x 1.5	16
ACM 176 WS	230/60/1	95	91	77	19.8	15.2	79.2	650	1800	3 x 1.5	16
ACS 176 WS	230/60/1	72	66	57	32.4	18.8	87.5	750	1070	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions